


Corrugated Sheet - Trapezoidal


Product Description/ Specification:

Corrugated sheets are used for cladding application and provide protection to installed equipment, towers, vessels and tanks


- Improves Strength: Increases strength to weight ratio of structures
- Minimises Wind Deflection: Distributes wind load to minimise deflection
- Improved Thermal Radiation: Minimises heat absorption and downward flow of heat

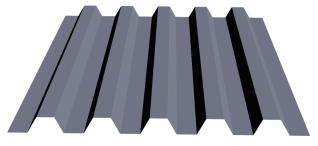

Pattern 20 corrugated sheet metal from 1250 mm wide raw material

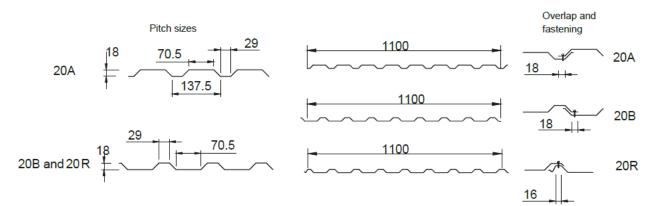

Pattern 20 corrugated sheet metal from 1000 mm wide raw material

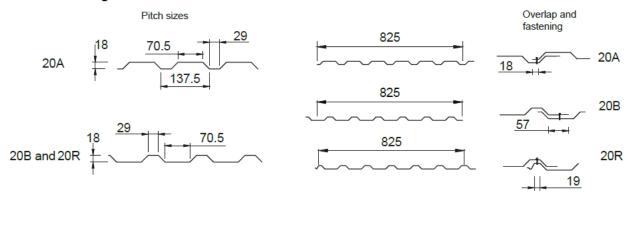




2731 ISO 9001: 2008




BS Stainless Limited—360 Leach Place, Walton Summit, Preston, PR5 8AS T: +44 (0) 1772 337555 F: +44 (0) 1772 313010 E: info@bsstainless.com www.bsstainless.com



Pattern 20 corrugated sheet metal from 1250 mm wide raw material

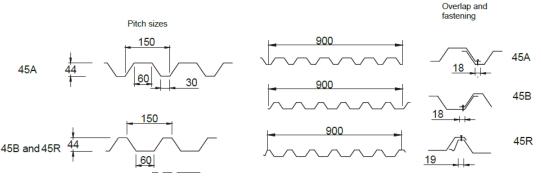

Pattern 45 corrugated sheet metal from 1000 mm wide raw material

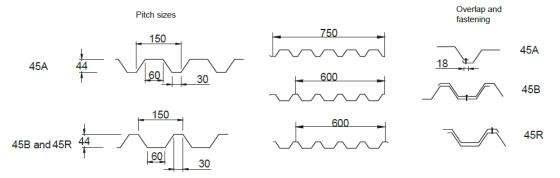

Fulfils the minimum requirements of the CE mark standards SFS EN 14783 and SFS EN 14782.

Product tolerances EN508-1,2,3:2000 and EN 502,505,507:2000.

Materials:

- Stainless Steel 0.40 to 0.80 mm
- Aluminium Plain and Stucco embossed 0.50 to 1.00mm
- Aluzinc 0.40 to 1.00mm
- Aluminised Steel 0.40 to 1.00mm

The corrugated sheets are also available with our innovative coatings:

- DryMet: 3 layer moisture barrier film for enhanced corrosion resistance..
- CoolMet: PVDF painted jacketing to improve radiative properties and abrasion resistance.
- DuPont[™] Tedlar[®] (PVF) film To improve external surface radiative properties and abrasion resistance.
- Polyester paint or other paint systems based on the specification, available in a wide range of colours.

The sheets are also available with a protective peel off polyfilm to protect the surface finish of the sheets.





BS Stainless Limited—360 Leach Place, Walton Summit, Preston, PR5 8AS T: +44 (0) 1772 337555 F: +44 (0) 1772 313010 E: info@bsstainless.com www.bsstainless.com